


- Directs heat up - towards the living space
- Increases efficiency of radiant heating systems
- Excellent vapor and radon barrier
- Quick and easy to install - reduces labour costs

## INSTALLATION METHOD

1. Unroll EcoFoil® insulation onto wood floor (clear poly side up, if applicable). Cut material to fit flush against walls.
2. Butt the seams and seal all joints with EcoFoil® white poly tape.
3. Install radiant heating system as per manufacturer's instructions.
4. Proceed with concrete pour as usual - ensuring a thickness of at least 3".

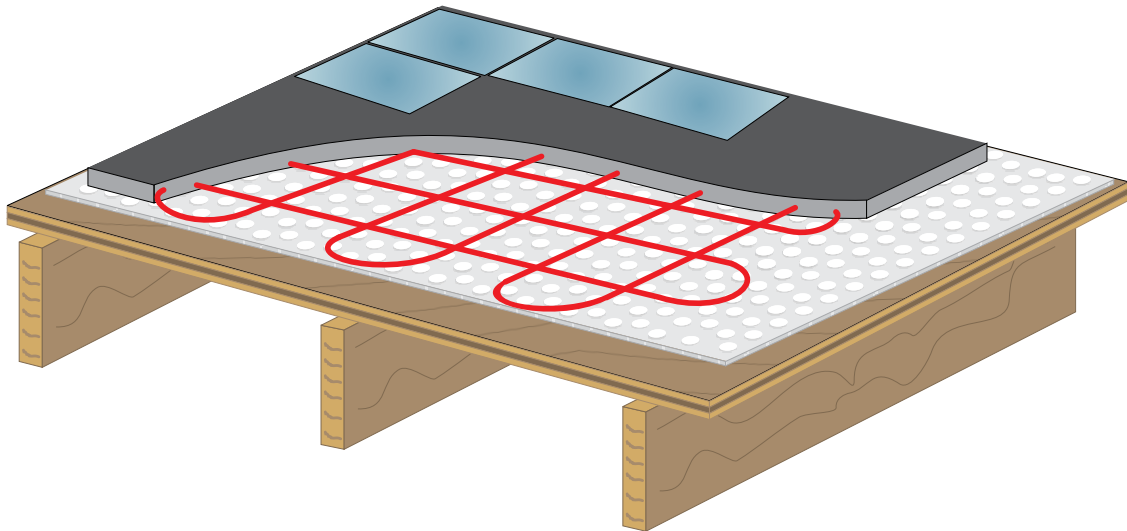

## SUGGESTED PRODUCTS FOR THIS APPLICATION:

- |                          |   |
|--------------------------|---|
| REFLECTIVE INSULATION    | > 1620-48-125, 4320-48-125, 1320-48-125 |
| EcoFoil® WHITE POLY TAPE | > 15853 (white poly)                    |

Check local building codes for compliance before installation. This installation sheet is intended solely to illustrate the proper location and placement of EcoFoil® Reflective Insulation products in specific construction applications. They are not intended to illustrate proper construction methods (which is ultimately the responsibility of the builder or contractor). The installation instructions are only recommendations relating to the location and placement of EcoFoil® Reflective Insulation products, and EcoFoil® makes no claims that these construction systems are universally accurate.

All warranties and performance estimates are void if EcoFoil® Reflective Insulation products are used in exterior applications, or in non-enclosed systems or buildings.

Exercise caution when using EcoFoil® Reflective Insulation products near and around electrical wiring and devices.