


- Ideal for damp basements where carpet is to be installed
- Reduces heat loss to the ground below
- Excellent vapor and radon barrier
- Quick and easy to install - helps to keep floor warm

### INSTALLATION METHOD

1. Unroll EcoFoil® Ultra CBF over concrete floor.
2. Seal the seams and butt joints using EcoFoil® tape- ensuring a continuous vapor barrier.
3. Install carpet as per **manufacturer's instructions**.

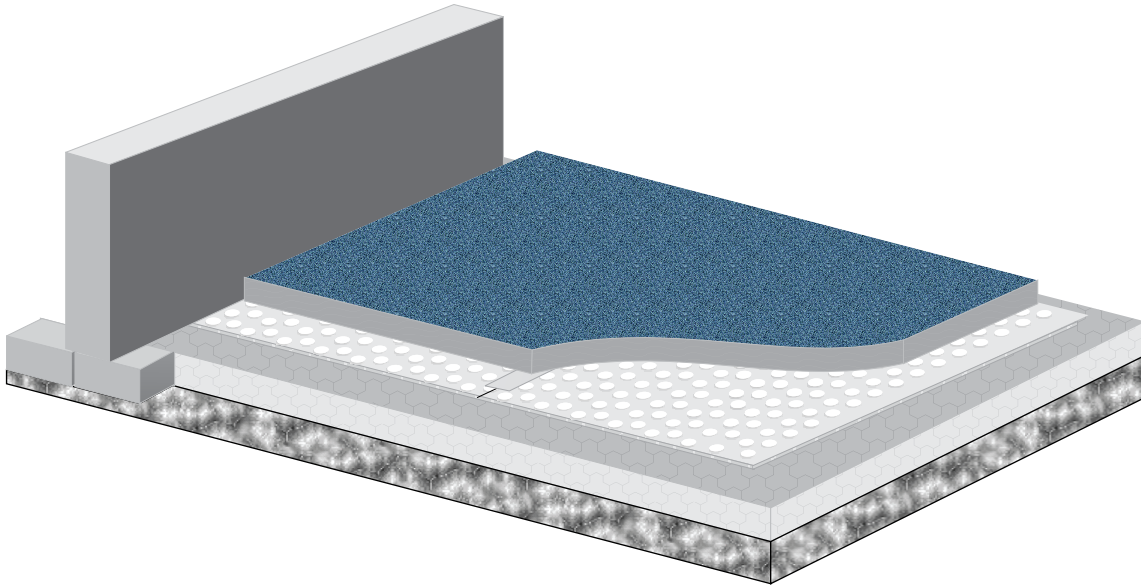

### SUGGESTED PRODUCTS FOR THIS APPLICATION:

- |                                   |  |
|-----------------------------------|--|
| REFLECTIVE INSULATION - ULTRA CBF | > 1620-48-125 (48" x 125')               |
| EcoFoil® WHITE POLY TAPE          | > 15213 (reflective), 15853 (poly white) |

Check local building codes for compliance before installation. This installation sheet is intended solely to illustrate the proper location and placement of EcoFoil® Reflective Insulation products in specific construction applications. They are not intended to illustrate proper construction methods (which is ultimately the responsibility of the builder or contractor). The installation instructions are only recommendations relating to the location and placement of EcoFoil® Reflective Insulation products, and EcoFoil® makes no claims that these construction systems are universally accurate.

All warranties and performance estimates are void if EcoFoil® Reflective Insulation products are used in exterior applications, or in non-enclosed systems or buildings.

Exercise caution when using EcoFoil® Reflective Insulation products near and around electrical wiring and devices.